

EMSU

Remote display for MicroScan™

EMSU allows you to view measured data and configure the MicroScan at ease from the control room or from the bottom of the tank.

EMSU remote display can be located up to 80 meters away from the MicroScan.

Specification


- Four digit LCD Display (Similar to the Monoscan)
- Four button keypad (Similar to the Monoscan)
- Cable length (EMSU –MicroScan) from 0.60m to 80m
- Extended range option (up to 15m measuring distance)
- Housing material ABS + UV
- Enclosure IP65
- Operating temperature -40°C / 70°C
- Dimensions 9.5 X 11 X 2.5 cm³ (3.7 X 4.3 X 0.98 in³)
- Weight 0.25 Kg (0.55 lb)
- Wall mounted
- CE Certification

EMSU is provided with a preselected cable length or a short cable with an IP68 connector. This allows you to add cable for additional length in the field or use one EMSU for multiple sites.


See Model Selection Guide for cable options.

See EMSU application Note for additional installation and operational guidelines.

Note: When connected to an EMSU, the Microscan needs to be powered by a 12-28V power source in addition to the 4-20mA 2 wires.

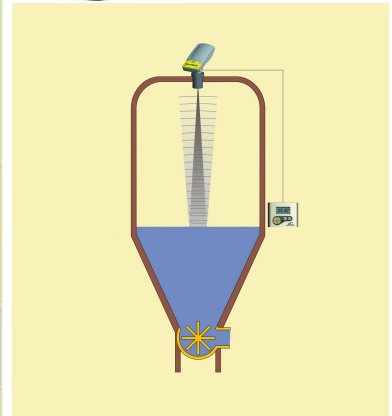

All specifications are subject to change without notice

MonoScan® and MicroScan™ are a registered trademarks of Solid Applied Technologies Ltd  Applied Technologies Ltd.



www.solidAT.com